

# 4G Door Intercom with LCD and Keypad



*SS2106M-12K-4G01E*




## Benefit

- The intercom provides screen display, which is convenient for visitors to inquire.
- SIM card based intercom / telephony system
- Answer calls with your phone anytime anywhere.
- Call in to open the door. No talk time.
- Extend to more householders with slave panels

## Features

- Easy installation and no indoor station
- The screen displays the resident's name and the inputted numbers.
- Two or more call panels with 1 SIM card
- Calls up to 5 numbers (landline or mobile) for each householder
- Call in to open the door (1500 numbers)
- For up to 500 apartments
- Can store up to 1000 password combinations for secure access

## System Configuration :

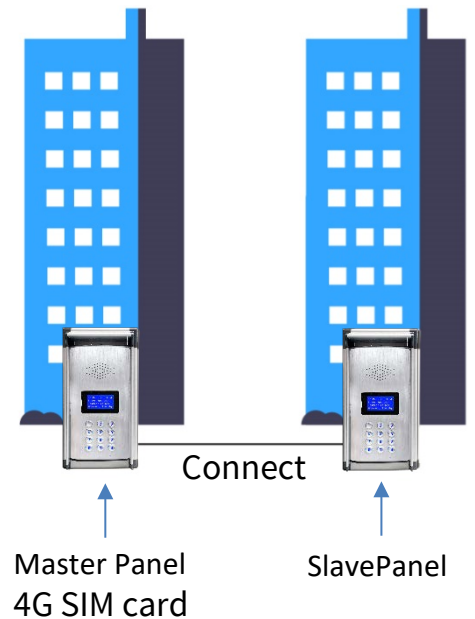

## Specification

|                         |  |
|-------------------------|--|
| Operating Voltage       | 12 to 24 Volt AC/DC  |
| Operating Current       | Maximum 250 mA, Typically 55mA   |
| GSM / 3G / 4G Frequency | SS2106-12D-4G01E: <ul style="list-style-type: none"> <li>● LTE FDD: B1/B3/B7/B8/B20/B28A</li> <li>● WCDMA: B1/B8</li> <li>● GSM: B3/B8</li> </ul> SS2106-12D-4G01A: <ul style="list-style-type: none"> <li>● LTE FDD: B2/B4/B12</li> <li>● WCDMA: B2/B4/B5</li> </ul> SS2106-12D-4G01AU: <ul style="list-style-type: none"> <li>● LTE FDD: B1/B2/B3/B4/B5/B7/B8/B28</li> <li>● LTE TDD: B40</li> <li>● WCDMA: B1/B2/B5/B8</li> <li>● GSM: B2/B3/B5/B8</li> </ul> |
| Physical size           | Face plate: 262 x 138 mm<br>324(H)*177(W)*65(D) mm   |
| Length of antenna       | 3 meters cable   |
| Humidity                | Less than 80% RH   |
| Operating Temperature   | -20°C to 50°C  |